




# INDEPENDENCE

★ WATER DEPARTMENT ★

## 6" WATER MAIN REPLACEMENT WALNUT STREET (LESLIE AVE. TO LEE'S SUMMIT RD.)

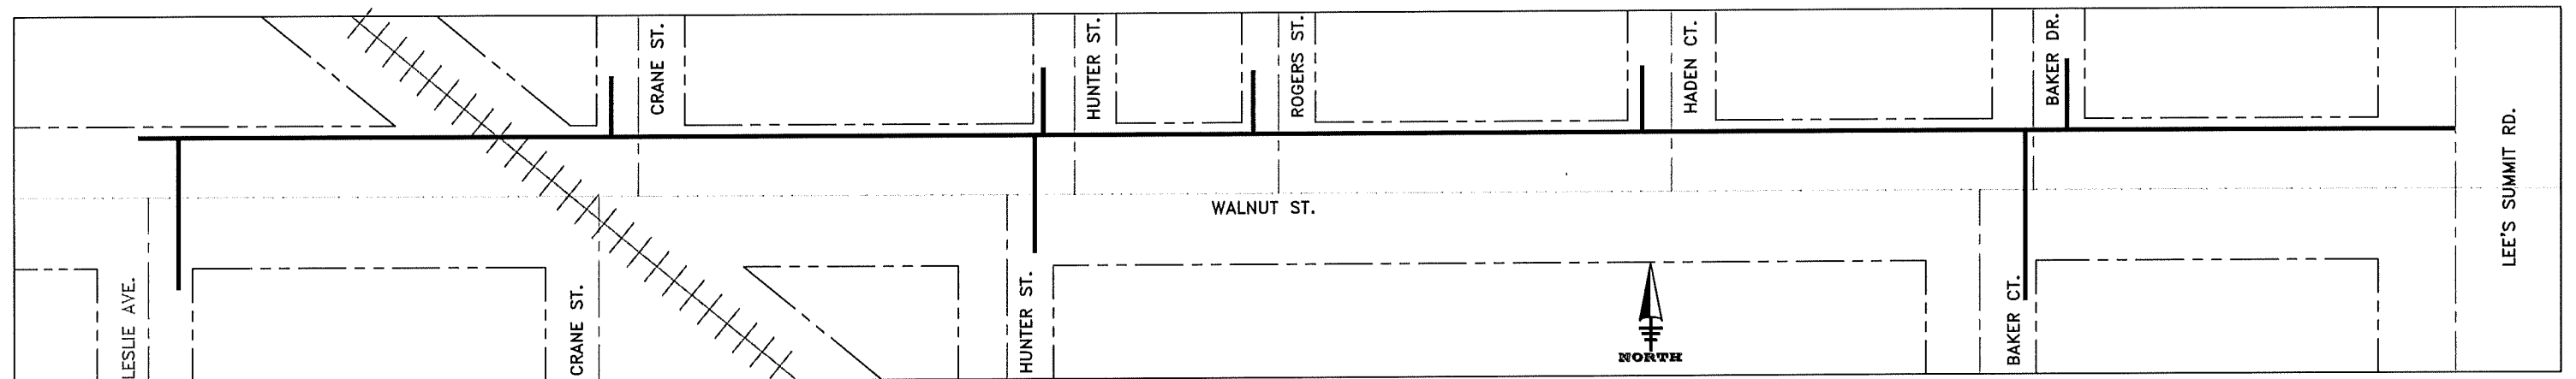

### UTILITY LOCATIONS AND CONTACT PERSON

AT&T	Mark Manion 500 E. 8th St., Room 1152 Kansas City, MO 64106 (816) 275-2341
AT&T LTE Gig	Zack Zuppan (816) 275-3393
AT&T Legacy	Lenny Vohs 1425 Oak St., Room 1 Kansas City, MO 64106 (816) 275-4014
Comcast	John Meadows 3400 W. Duncan Rd. Blue Springs, MO 64015 (816) 795-2257
Indep. Power & Light	Lee Donner 21500 E. Truman Rd. Independence, MO 64056 (816) 325-7450
Indep. Water Dept.	Scott Howell 17221 E. 23rd St. Independence, MO 64057 (816) 325-7650
Spire	Chris Gunderson 3025 SE Clover Dr. Lee's Summit, MO 64082 (816) 266-1501
Water Pollution Control (Storm & Sanitary) Sewer Maint Division	Richard Kemple 14909 E. Truman Rd. Independence, MO 64050 (816) 325-7727

*Mayor:*

*Eileen Weir*

*Council Members:*

*John Perkins*

*Brice Stewart*

*Mike Steinmeyer*

*Dan Hobart*

*Mike Huff*

*Karen DeLuccie*

*City Manager:*

*Zachary Walker*

*Water Dept. Director: Dan Montgomery*

### General Notes:

- 1) It shall be the responsibility of the contractor to protect all property lot corners and control points. Should it be necessary to disturb any such monument, whether stake, pin, bar, disk box, etc., it remains the responsibility of the Contractor to reference such markers prior to removal, reset them and file such monument as the law may require. Any such reference, removal, replacement and certification of monuments shall be performed by a Missouri Professional Licensed Surveyor. A copy of all such certification documentation shall be provided to the Water Department Inspector prior to final payment.
- 2) All driveways on north side of Walnut from Haden St. to Lee's Summit Rd. to be repaired with 6" of reinforced concrete (4000 psi) from street to R/W. See detail.
- 3) Contractor to make all road repairs and cleanup per City of Independence requirements.
- 4) Contractor will be responsible for any plates that may be required to allow road to remain open.
- 5) Water Department will be responsible for operating all valves and re-filling water mains.
- 6) Contractor responsible for pot-holing all existing utility lines and sanitary sewer lines to determine depths in conflict with water mains.
- 7) Contractor responsible for removal of all existing meter well and curb boxes once all service lines have been changed over to new water mains per detail.
- 8) Contractor responsible for removing all existing fire hydrants, valve boxes on abandoned main once new water main is in service. Contractor responsible for making all repairs where fire hydrants and valve boxes have been removed.
- 9) Contractor responsible for making sure all culvert pipes are clear of debris and able to flow water. If not contractor is to clean out culvert pipes, as needed.
- 10) Contractor to wipe down all piping at tie-in points with 50ppm HTH.
- 11) Contractor to hydrostatic pressure test water main.